

Group control relay WGGS-2



elsner
elektronik


Product information:

The WGGS-2 decoupling relay can operate up to two drives as a group. The built-in device can be fitted in a junction box, wiring channel or section.

Technical specifications:

| | |
|-----------------------|--------------------------------------------------------|
| Installation: | Mounting |
| Protection rating: | IP 20 |
| Dimensions: | approx. 38 × 47 × 30 (W × H × D, mm) |
| Weight: | approx. 55 g |
| Ambient temperature: | Operating -20...+70 °C, Storage -55...+90°C |
| Ambient air humidity: | max. 95% rH, avoid condensation |
| Operating voltage: | 230 V AC / 50 Hz |
| Control input: | 230 V AC, 50 Hz (Up/Down/N/PE) |
| Outputs: | 2 × 230 V AC (Up/Down/N/PE), 8 A each, tot. max. 500 W |

Connection diagram:

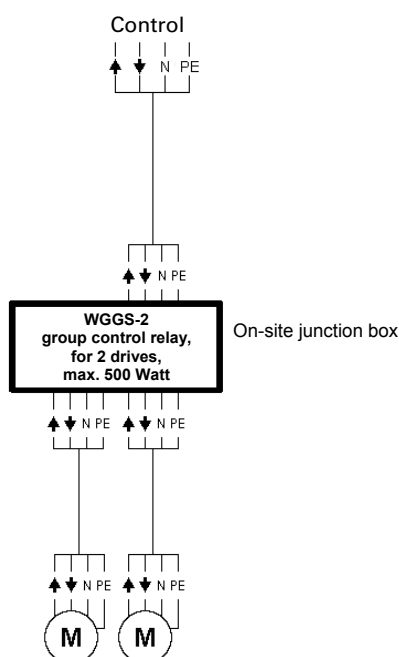

WGGS-2 group control relay

Elsner Elektronik GmbH • Herdweg 7 • D-75391 Gechingen • Germany • www.elsner-elektronik.de
Issued 02/03/10 • Errors subject to correction. Data subject to change.