


## Group control relay WGGS-4-H

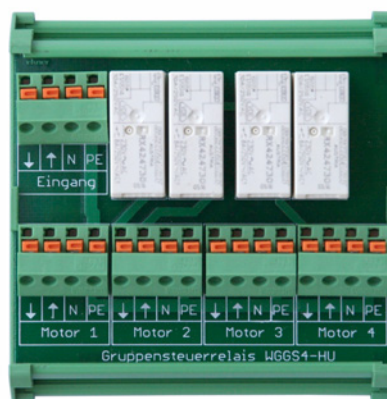

**elsner**  
elektronik

### Product information:

The WGGS-4-H decoupling relay can operate up to four drives as a group. Connections are screwless, using cage clamp terminals.

### Technical specifications:

Installation:	Series installation on DIN rail
Protection rating:	IP 20
Dimensions:	approx. 88 × 90 × 50 (W × H × D, mm), 5 width units
Weight:	approx. 140 g
Ambient temperature:	Operating -40...+50°C, Storage -55...+90°C
Ambient air humidity:	max. 95% rH, avoid condensation
Operating voltage:	230 V AC / 50 Hz
Control input:	230 V AC, 50 Hz (Up/Down/N/PE)
Outputs:	4 × drives, 230 V AC (Up/Down/N/PE), 8 A each, tot. max. 500 W