


WG-PF dry contact relay

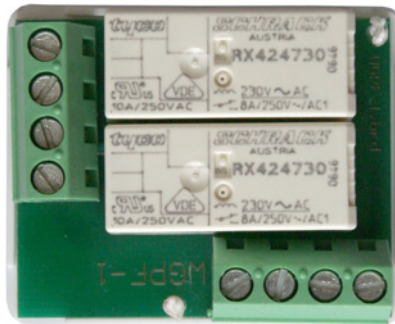

elsner
elektronik

Product information:

The RP-H dry contact relay is fitted with a change-over contact for "Up" and "Down". Control commands can thus be transferred to other systems. The built-in device can be fitted in a junction box, wiring channel or section.

Technical specifications:

Installation:	Mounting
Protection rating:	IP 20
Dimensions:	approx. 38 x 47 x 30 (W x H x D, mm)
Weight:	approx. 50 g
Ambient temperature:	Operating -20...+70 °C, Storage -55...+90°C
Ambient air humidity:	max. 95% rH, avoid condensation
Control input:	230 V AC (Up/Down/N/PE)
Outputs:	1 x up, dry contact, max. 230 V / 8 A 1 x down, dry contact, max. 230 V / 8 A