


**LUXOMAT® IR-LC-plus**



**TECHNICAL DATA**

- Lithium CR2032 - 3 Volt (inclusive) depending on lighting conditions
- clouded or dark:** 5 to 6 m;
- sunshine:** 2 to 3 m
- L 80 x W 60 x H 8 mm

▶ The LUXOMAT® IR-LC-plus remote control can also be used with the LC-plus 280 motion detector!

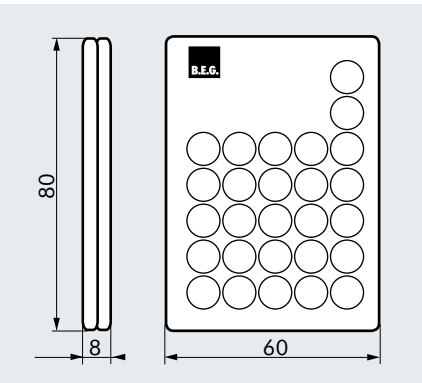

**PRODUCT INFORMATION**

- Using the LUXOMAT® IR-LC-plus infrared remote control, all settings can be made comfortably from the ground without having the annoyance of setting up ladders. It is suitable for the LUXOMAT® AL21 outdoor lamps and the LUXOMAT® FLC-280-LED and AL5-LC outdoor floodlights.
- The great variety of programs facilitates adapting the motion detector to all individual wishes at any time – even subsequently.
- Additional features like automatically reading-in the current daylight value or the useful 2 sec.-test function are also optionally available with the IR-LC-plus.
- The lights can be switched on or off anytime with just a touch of the button. That means it is not necessary to install an additional light switch.
- Comes complete with a practical wall bracket (dimensions (approx.): 63 x 29 x 19 mm).

**PROGRAM FUNCTIONS**

		<b>Preselected light value</b> - Daylight operation		Programmable <b>Opening and closing</b> – also with parental lock and security against sabotage after setting up
		<b>Preselected light value</b> - approx. 100 Lux = started dawn		<b>Automatic reading and saving of the actual light level</b>
		<b>Preselected light value</b> - approx. 25 Lux = advanced dawn		<b>Party program</b> - Constant light for 12 hours or light off
		<b>Preselected light value</b> - Operation at night		<b>Reset</b> - Resetting of all functions
		<b>8 preselected switch on times</b> from 15 sec. to 16 min.		<b>Vacation- and comfort function</b> - Automatically switching on at dusk
		<b>Alarm function</b> - Blinking of the connected lighting after detected motion		<b>Test operation</b> - The surveyed room can be paced out independent of surrounding brightness and can be aligned easily after that.
		<b>LED-Button</b> - Activate and deactivate the walking test LED		<b>Impulse function</b> - Send of a short impulse of approx. 1 sec., for example to activate a door gong.
		<b>Electronic sensitivity control</b> - Increase and decrease of the detector range		<b>Light OFF</b> - Followed by two seconds without motion detection: allows leaving out of the detecting range

Description	Colour	Part number
LUXOMAT® IR-LC-plus	grey	92095