

LUXOMAT® IR-PDim




■ TECHNICAL DATA

- Lithium CR2032 - 3 Volt (inclusive) depending on lighting conditions
- clouded or dark:** 5 to 6 m;
sunshine: 2 to 3 m
- L 80 x W 60 x H 8 mm

i PRODUCT INFORMATION

- Using the LUXOMAT® IR-PDim infrared remote control, all settings can be made comfortably from the ground without having the annoyance of setting up ladders. It is suitable for the following detectors: LUXOMAT® PD1-M-DIM, PD2-M-DIM, PD4-M-DIM, PD4-M-DUO-DIM, PD5-M-DIM and PD9-M-DIM.
- The great variety of programs facilitates adapting the motion detector to all individual wishes at any time – even subsequently.
- Additional features like automatically reading-in the current daylight value or the useful 2 sec.-test function are also optionally available with the IR-PDim.
- The lights can be switched on or off anytime with just a touch of the button. That means it is not necessary to install an additional light switch.
- Comes complete with a practical wall bracket (dimensions (approx.): 63 x 29 x 19 mm).

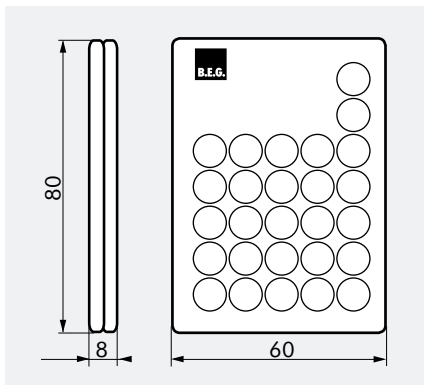

■ PROGRAM FUNCTIONS

		Programmable Opening and closing – also with parental lock and security against sabotage after setting up		Reset - Resetting of all functions
		Test operation - The surveyed room can be paced out independent of surrounding brightness and can be aligned easily after that.		Switching on and off of the light - The light can be switched on and off via the remote control at any time. In addition, the switch allows changes between automatic and semiautomatic operating modes.
		7 preselected light values - 50 to 1500 Lux; Recommendation: rooms with daylight 300 Lux, without daylight 1000 Lux.		Permanent tamper protection - Permanent inhibition of the detector; only ON- and OFF function on the remote control possible.
		Automatic reading and saving of the actual light level		Manual switch on and off of the orientation light (20% of the nominal light) - For permanent orientation light push the ON-button. Switch-off the orientation light with the OFF-button.
		Preselected switch on times for the lighting: - 1 min. to 30 min.; The desired follow-up time for the connected lighting can be programmed by pressing the respective white time switches.		4 preselected switch on times for the orientation light - From 1 to 30 min. after the preselected follow-up time for the lighting with 20% of the nominal light.
		Dim buttons for constant light control: - Temporary or permanent modification of the constant light level		

Description	Colour	Part number
LUXOMAT® IR-PDim	grey	92200