


LUXOMAT® IR-RC



TECHNICAL DATA

- Lithium CR2032 - 3 Volt (inclusive) depending on lighting conditions
- clouded or dark:** 5 to 6 m;
sunshine: 2 to 3 m
- L 80 x W 60 x H 8 mm

▶ The LUXOMAT® IR-RC remote control may also be used for the RC-plus next 130/230/280 and RC-plus next 230 ZW motion detectors!

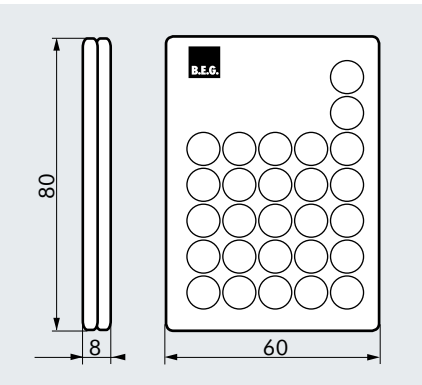

PRODUCT INFORMATION

- Using the LUXOMAT® IR-RC infrared remote control, all settings can be made comfortably from the ground without having the annoyance of setting up ladders. It is suitable for use with the LUXOMAT® AL2-RC-plus outdoor lamps and the LUXOMAT® FL2-LED-230 and AL5-RC-plus next outdoor floodlights.
- The great variety of programs facilitates adapting the motion detector to all individual wishes at any time – even subsequently.
- Additional features like automatically reading-in the current daylight value or the useful 2 sec.-test function are also optionally available with the IR-RC.
- The lights can be switched on or off anytime with just a touch of the button. That means it is not necessary to install an additional light switch.
- Comes complete with a practical wall bracket (dimensions (approx.): 63 x 29 x 19 mm).

PROGRAM FUNCTIONS

	Preselected light value - Daylight operation		Programmable Opening and closing – also with parental lock and security against sabotage after setting up
	Preselected light value - approx. 100 Lux = started dawn		Automatic reading and saving of the actual light level
	Preselected light value - approx. 25 Lux = advanced dawn		Party program - Constant light for 12 hours or light off
	Preselected light value - Operation at night		Reset - Resetting of all functions
	8 preselected switch on times from 15 sec. to 16 min.		Vacation- and comfort function - Automatically switching on at dusk
	Alarm function - Blinking of the connected lighting after detected motion		Test operation - The surveyed room can be paced out independent of surrounding brightness and can be aligned easily after that.
	LED-Button - Activate and deactivate the walking test LED		Impulse function - Send of a short impulse of approx. 1 sec., for example to activate a door gong.
	Activate and deactivate of the 360°- anti-creep		Light OFF - Followed by two seconds without motion detection: allows leaving out of the detecting range
	Electronic sensitivity control - Increase and decrease of the detector range		

REMOTE CONTROLS

Description	Colour	Part number
LUXOMAT® IR-RC	grey	92000