

Installation and Operating Instruction for B.E.G. - Mini occupancy detector PD9-M-1C-S(-GH)-FC


1. Mounting preparation

Work on the 230V mains supply may only be carried out by qualified professionals or by instructed persons under the direction and supervision of qualified skilled electrical personnel in accordance with electrical regulations.

Disconnect supply before installing!
The device is not suited for safe disconnection of the mains supply.

When in Master/Slave mode of operation, the Master-appliance must always be installed at the location where there is least daylight.

2. Installation LUXOMAT® PD9-M-1C-FC



The detector has been designed and developed specifically for installation in suspended ceilings.


A circular opening of diameter min. 34 mm must be produced in the ceiling.

Having connected the cables in accordance with the regulations, connect the power supply via the RJ11 plug. Therefore, open the power supply with the help of the screws and close it afterwards. After that, put the power supply through the opening in the ceiling and mount the sensor onto the ceiling according to figure.

3. Hardware configuration

Position LED's s

LED 1 green
LED 2 red
LED 3 white




Self test cycle

After an initial 60-second self-test cycle, the LUXOMAT® PD9-M-1C-FC is ready for operation. (see LED function displays see point 19).

4. Putting into operation of the remote control IR-PD-1C (optional)


Check Battery:

Open battery compartment by pressing the plastic springs together and removing the battery-holder.



Caution: Settings with remote control supersede the settings by potentiometers.


5. Option: Remote control IR-PD-1C



Wall bracket for remote control IR-PD-1C

An adhesive film for the surface of the IR-PD-1C is included with the device. If required, this can be used for any B.E.G. remote control with 27 keys.

7. Settings by remote control

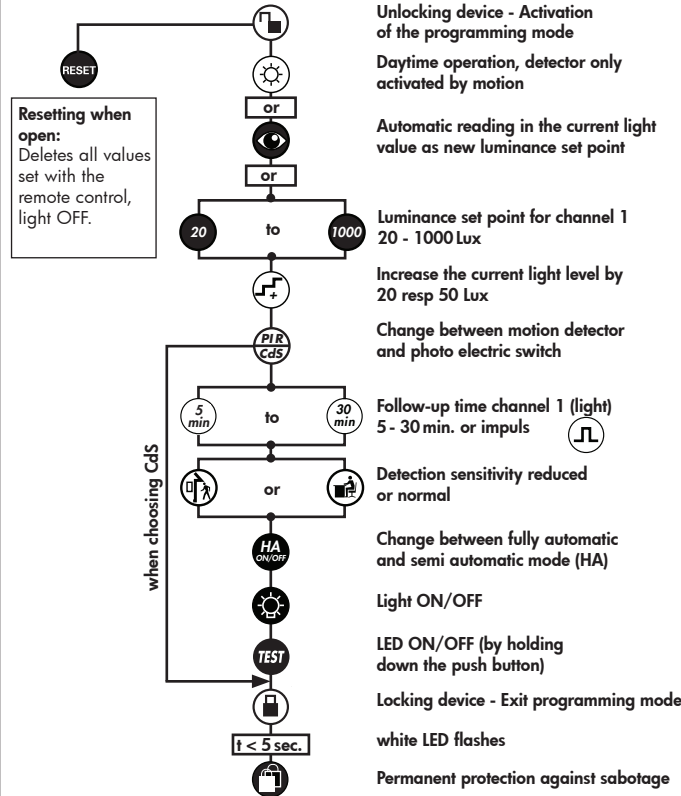

8. Key functions in closed state

- Permanent protection against sabotage**
This function blocks the unit permanently. This operating mode can only be activated during the period of 5 seconds (white LED flash) after pressing the "Lock" button. The procedure for leaving this mode is as follows:
1. Switch off the current
2. Apply current for 31 - 59 seconds
3. Switch of the current again
4. Apply current, wait for selftest cycle
5. Open detector
- Light ON/OFF during the detection of motion plus follow-up time; Activation of the 12 h-ON/OFF-function by holding down the push button**
- Activation/Deactivation of the test function**
- Switches channel off and is immediately active again, exits all timers, interruption of light measurement**
- Confirmation**
- Changes to „open“ state**

9. Explanation of the remote control button functions

9a. In the initialisation period

- 12h Light ON/OFF (party function)**
Activated by "Light" - push button
- Deactivated by "Reset" - push button (default)

- Corridor function (see point 11 a)**
Activated by "outside" - push button
- Deactivate by "inside" - push button (default)

- Forced shutdown (see point 11 c)**
Activated by "sun" - push button
- Deactivate by "moon" - push button (default)

9b. In opened state

- This push button opens the detector and the following functions can then be programmed.
Attention: The detector is closed automatically:
• after every voltage recovery
• after 3 minutes

- The state changes to "closed".
In the first 5 seconds, the white LED flashes every 0.5 seconds. During this time, sabotage protection can be activated.

- The device distinguishes between 2 procedures:
• **Reading in with lighting switched on:**
The switch-on value is determined automatically.

- Determining the switch-on value:
1. Press the "eye" push button
 2. Switch off the light (2 seconds later)
 3. Read in the brightness
 4. Switch-on value = Read brightness

- **Reading in with lighting switched off:**
When the push button is pressed, the current brightness is specified as the switch-on value. The switch-off value is determined automatically.

- If the brightness has been modified, the switch-off threshold is recalculated.

- Each time the push button is pressed, the device increases the current switch-on value in increments of 20 lux for a current switch-on value of < 100 lux and in increments of 50 lux for a current switch-on value of > 100 lux.

- Standard sensitivity for most applications
- Reduced sensitivity for outdoor applications

- When the pulse function is active, a pulse of 1 sec. is generated every 9 sec. If the pulse function is activated via remote control, the pause between 2 pulses can be modified. After activating the function via the "Pulse" push button, select the desired time within 5 sec.:

$$\left(\frac{5}{min}\right) = 9 \text{ sec.}, \left(\frac{10}{min}\right) = 10 \text{ sec.}, \left(\frac{15}{min}\right) = 15 \text{ sec.}, \left(\frac{30}{min}\right) = 30 \text{ sec.}$$

- The "Test" push button can be used to set the LED ON/OFF function. To do this, hold down the push button for 3 sec. **Please note** that in the open state and in test mode, the LED indicators are always ON.

Twilight switch function (CdS)

- If the CdS function is active, the detector acts as a simple twilight switch. Only the brightness can be set in this mode. Movements are no longer indicated by the red LED.

Push button acknowledgement:

- Each push of a button is indicated by lamp acknowledgement and by the white LED.
"Light ON" status: OFF/ON (approx. 0.5 sec. each)
"Light OFF" status: ON/OFF (approx. 0.5 sec. each)

10. Switch-off threshold brightness

- If the switch-on threshold has been modified by the potentiometer or remote control, the switch-off threshold stored in the EEPROM is deleted and is then recalculated on the next activation.

Determining the switch-off value

- Switch on for 5 min. with dark and motion
 - Light OFF for 2 sec.
 - Internal calculation of the switch-off value
- If the eye push button is pressed, the switch-off threshold is recalculated. See also Remote control → Eye section
- Switch-off delay
If the determined switch-off threshold is exceeded during operation, the detector only switches off after a delay of approx. 15 minutes. This compensates for any brief fluctuations in the brightness.

11 a. Behaviour of external push button/IR "Light"

The "Corridor" and "Light ON/OFF" functions are mutually exclusive. If both are activated, the detector performs the corridor function.
The behaviour when the push button is pressed is defined as follows:

Corridor function activated

Light ON:

Push button pressed briefly: Light OFF → Active after 5 sec.
Push button held down: Light OFF → Active after 5 sec.

Light OFF:

Push button pressed briefly: Light ON as long as motion + Lag time
Push button held down: Light ON as long as motion + Lag time

11 b. Behaviour of external push button/IR "Light"

12 h Light ON/OFF activated

Light ON:

Push button pressed briefly: Light OFF → Active after 5 sec.
Push button held down: 12 h OFF

Light OFF:

Push button pressed briefly: Light ON as long as motion + Lag time
Push button held down: 12 h ON

12 h Light ON/OFF deactivated

Light ON:

Push button pressed briefly: Light OFF as long as motion + Lag time
Push button held down: Light OFF as long as motion + Lag time

Light OFF:

Push button pressed briefly: Light ON as long as motion + Lag time
Push button held down: Light ON as long as motion + Lag time

11 c. Behaviour of external push button/IR „Forced shutdown“

Forced shutdown active

Light OFF:

Light OFF: Push button pressed briefly: Light ON for approx. 30 min., then forced shutdown if the set brightness is still exceeded.

12. Other functions

Activation of light for 12 h via mains interruption

- Interrupt current
- Apply current for 2 to 5 sec.
- Interrupt current again
- Apply current
- Detector is now ON for 12 h

Exiting sabotage

- Interrupt current
- Apply current for 30 to 60 sec.
- Interrupt current again
- Apply current
- Detector is in simple closed state

230 V AC permanently at the slave input

If 230 V AC is applied at the slave input for longer than 10 sec., the light is switched on permanently. When the 230 V is removed, the light is switched off and automatic mode is activated.

230 V AC for 1 - 3 sec. at push button connection S

If 230 V AC is applied for 1 - 3 sec. at push button connection S, this is interpreted as a slave signal at slave connection R. This ensures that the detector is compatible with previous versions.

13. Reset and default settings

1. Default settings

If the detector is not programmed, the factory setting is activated: 500 Lux and 10 min

2. Reset

After a reset in open state, all factory settings are activated.



14. Fully automatic and semi automatic mode

(see functions IR-PD-M-1C)



Fully automatic operation


In this operating mode, the lighting switches automatically on and off for increased comfort, depending on presence and brightness.
- Channel 1 switches on in the event of motion if "dark" is detected.

Semi automatic operation


In this operating condition, in order to gain increased savings, the lighting is energized only after being manually switched on. Switch-off takes place automatically or manually. The semi automatic mode basically behaves like the fully automatic one. However, the difference is that switching-on must always be carried out manually!
As many (NO-contact) buttons as desired can be wired in parallel on the "S" button input (ON/OFF).

Triggering in semi automatic mode: If the detector switches off in semi automatic mode (lag timer elapsed), the detector is switched on again within 10 sec. by motion (despite semi-automatic mode).

15. Range of Coverage

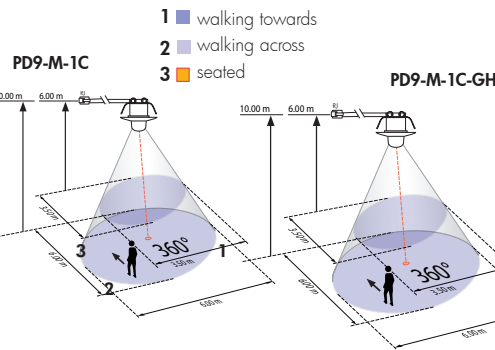

16. Exclude sources of interferences

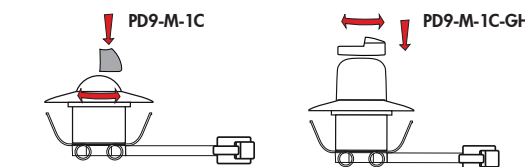

In case the sensing area of the LUXOMAT® PD9-M-1C-(GH)-FC is too large or areas are being covered that should not be monitored, the range can be reduced or limited through use of the enclosed masking clips.

19. LED function displays

LED function indicators after each mains recovery (60 sec. initialisation period)			
Operating state	LED function indicators		
Factory program active	White, red and green flash in quick succession for 10 sec., then initialisation indicators, see below		
Double-locked	White and green shines for 5 sec. all 20 sec., afterwards initialising notification		
	Indicator unprogrammed	Indicator programmed	Indicator also when forced shutdown is activated
Standard mode	Red flashes	Red flashes quickly	Every 5 sec., 4 x white, red and green in quick succession
12 h ON/OFF active	Red and green flash	Red and green flash quickly	Every 5 sec., 4 x white, red and green in quick succession
Corridor active	Red and white flash	Red and white flash quickly	Every 5 sec., 4 x white, red and green in quick succession
12 h ON/OFF & corridor active	Red, green and white flash	Red, green and white flash quickly	Every 5 sec., 4 x white, red and green in quick succession
CdS active	-	Red and white flash	Then <u>no</u> red LED for motion detection

LED function indicators during operation	
Process	LED function indicators
Motion detection	Red flashes on each detected movement
Semi automatic mode active	White is ON
Impulse mode active	Red and green flash one time all 4 sec.
Corridor active	White ON 1 sec. and OFF 4 sec.
Corridor and semi automatic mode active	White ON 4 sec. and OFF 1 sec.
Too bright detected	Green flashes
Light measurement active	Green flashes once every 10 sec.
12 h ON/OFF function active	Red and green flash alternately
Duration ON active (by slave)	Red flashes quickly
IR command	White flashes once
IR command "Open" and sabotage active	White and green flash once slowly

17. Technical data PD9-Master-1C

Connection of sensor and power supply by means of telephone plug R J11

Power supply: 230 V ~ ±10 %
Power consumption: < 1 W
Ambient temperature: -25°C – +50°C
Degree of protection/class: IP20 / II

Settings: by remote control
Light values: 20 - 1000 Lux
Extension of the detection area: with Slaves
Area of coverage: circular 360°
Range Ø H 2.50m/T=18°C:
seated 4.00m / tangential 10 m / radial 6 m

Recommended height for mounting: 2 - 3 m

Light measurement: daylight and artificial light

• One channel to switch the lighting

Type of contact: NOC/with pretravel tungsten contact

Contact load: 2300 W cos φ=1 / 1150 VA cos φ=0.5, μ-Contact

Time-settings:

5 min. - 30 min. / Test with remote control

Dimensions:

PD9-M-1C-FC H 28 x Ø 45 mm
PD9-M-1C-GH-FC H 40 x Ø 45 mm
Power supply L 165 x W 24 x H 24 mm

Visible part when built into ceiling:

PD9-M-1C-FC H 12 x Ø 45 mm
PD9-M-1C-GH-FC H 24 x Ø 45 mm


Technical data PD9-Slave

Power supply: 230 V ~ ±10 %
Impulse output: Optocoupler max. 2 W
Impulse duration: 9 sec.
Dimensions: see above

CE Declaration of Conformity: The product complies with the low voltage recommendation 2006/95/EC and the EMV recommendation 2004/108/EC.

18. Wiring diagram

Standard mode master 1-channel occupancy detectors with R and S terminal

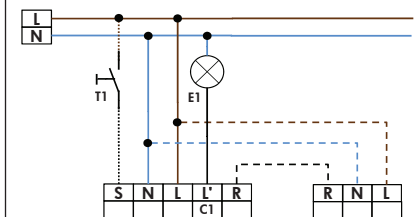

optional: T1 = NO - Push button for semi automatic;
Extension of the detection area with Slave-devices

20. Article / Part nr. / Accessory

Typ	RAL9010	RAL9006
PD9-M-1C-FC (Master)	92900	92901
PD9-S-DE (Slave)	92905	92906
PD9-M-1C-GH-FC	92923	92925
PD9-S-GH-DE (Slave)	92928	92929

LUXOMAT® Remote control:

IR-PD9 (incl. wall bracket) 92201
IR-PD-Mini 92159

Accessory:

Cover ring for PD9 white 92238
Cover ring for PD9 silver 92237
Cover ring for PD9 anthracite 92235
Blind GH white 33207