LUXOMAT® IR-PD



■ TECHNICAL DATA

②

Lithium CR2032 -3 Volt (inclusive) depending on lighting conditions

clouded or dark: 5 to 6 m;

sunshine: 2 to 3 m

.

L80 x W 60 x H 8 mm


(i) PRODUCT INFORMATION


- Using the LUXOMAT® IR-PD infrared remote control, all settings can be made comfortably from the ground without having the annoyance of setting up ladders. It is suitable for the Master versions of following detectors:

 LUXOMAT® PD1, PD2, PD4, PD4-Corridor, PD5 and Indoor 180
- The great variety of programs facilitates adapting the motion detector to all individual wishes at any time – even subsequently.
- Additional features like automatically reading-in the current daylight value or the useful 2 sec.-test function are also optionally available with the IR-PD.
- The lights can be switched on or off anytime with just a touch of the button. That means it is not necessary to install an additional light switch.
- Comes complete with a practical wall bracket (dimensions (approx.):
 63 x 29 x 19 mm).

PROGRAM FUNCTIONS

80



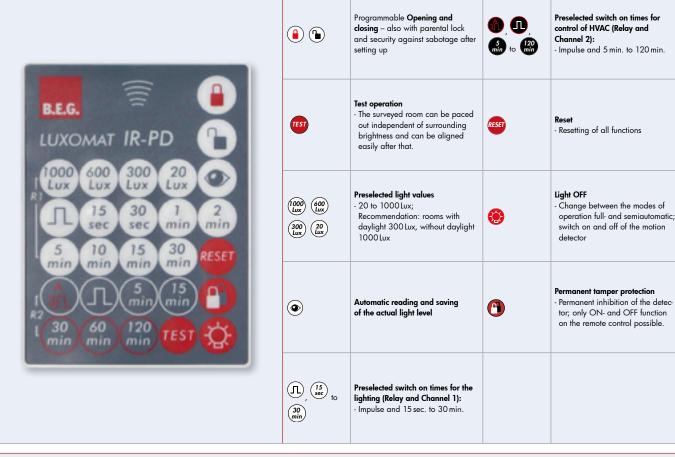

Description	Colour	Part number
LUXOMAT® IR-PD	grey	92160