

LUXOMAT® LC-plus 280




white



brown



black





silver

TECHNICAL DATA

- 230V~ ±10%
- 280°
- max. 16 m when walking across (tangential)
- IP44 / Class II / C€
- L 100 x W 68 x H 78 mm
- 25°C to +50°C
- Housing UV- and shock-resistant Polycarbonate
- IR-LC-plus, IR-LC-Mini
- Channel 1 (light control)**
- 2000 W, cos φ = 1; 1000 W, cos φ = 0,5
- 15 sec. - 16 min. or pulse for bell function
- 2 - 2500 Lux


PRODUCT INFORMATION

- New, electronic micro processor controlled motion detector with 360°-anti-creep for a gapless monitoring
- Spherical head adjustable
- The detection area can be altered by blinds, which are included. The blinds can be clipped-on and moved to stop unwanted detection, making it possible to achieve detection areas of less than 280°, such as 90°, 130° or 230°. Blinds included, also for 360° anti-creep cover
- Adjustment light level and time setting by screwdriver or potentiometers at the bottom of the detector ball,.
- The product is programmed for immediate use with light level 20 Lux and time setting 3 min.
- Mounting bracket for outside corners included (**supplied as standard**)
- Easy installation with plug-in socket
- **Application examples:** monitoring two sides of a building, warehouses, parking lots

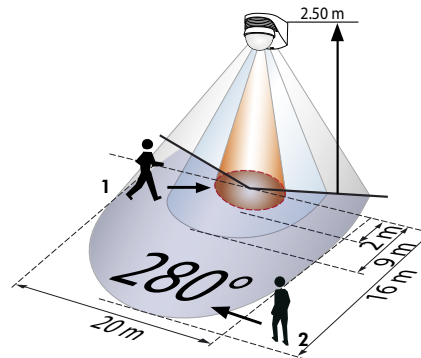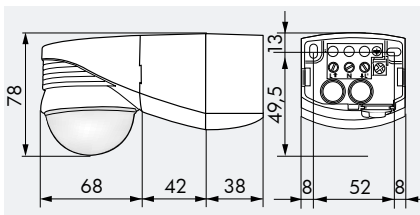

- 1 ■ Walking towards
- 2 ■ Walking across
- Anti-creep

ACCESSORY (OPTIONAL)

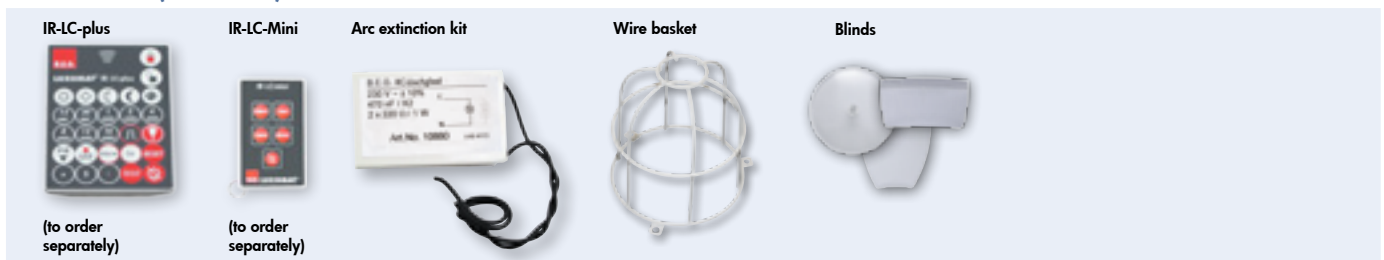

Description	Colour	Part number
LC-plus 280	white	91008
LC-plus 280	brown	91018
LC-plus 280	black	91028
LC-plus 280	silver	91048
Accessory (optional)		
LUXOMAT® IR-LC-Mini	grey	92093
LUXOMAT® IR-LC-plus	grey	92095
Arc extinction kit	white	10880
Wire basket BSK	white	92467