


LUXOMAT® PD9-M-1C-SDB-IP65-GH-FC




Protection IP65 for moisture proof applications



"Size comparison"

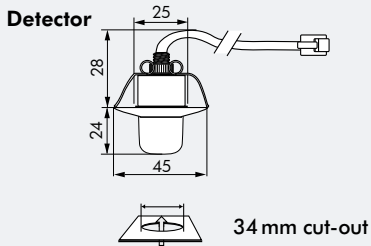

Power supply




L 154 x W 38 x H 25 mm

TECHNICAL DATA

- 230V~ ±10%
- 360°
- max. Ø 5.40m
- Detector IP65 / Class II / CE**
- Detector**
Ø 45 x H 52 mm
- Power supply**
L 154 x W 38 x H 25 mm
- 25°C to +50°C
- Housing UV- and shock-resistant Polycarbonate
- IR-PD9, IR-PD-Mini
- Channel 1 (Control the lighting)**
- 2300 W, cosφ = 1;
1150 VA, cosφ = 0.5
- 15 sec. - 30 min.
- 10 - 2000 Lux

PRODUCT INFORMATION

- Remote controllable mini-occupancy detector for inside use **LUXOMAT® PD9-M-1C-SDB-IP65-GH-FC** as Master version with circular detection area and a range up to e.g. 5.40m ideal for high-bay storages
- One channel to switch the lighting (potential free)
- The connection of one slave for reasonable extension is possible!
- In spite of small dimensions it switches all types of light fixtures using high performance relay with in rush current limitation especially for electronic ballasts.
- Many programmes adjustable with the remote control **LUXOMAT® IR-PD9** (accessory)
- Version with special lens and spring-clamps for quick, easy installation in lights or suspended ceilings
- **Typical applications:** bathrooms, shower cubicle, hospitals etc.

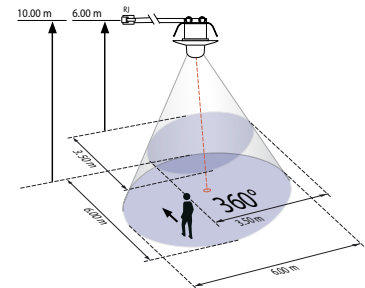

ACCESSORY (OPTIONAL)

IR-PD9



(to order separately)

IR-PD-Mini



(to order separately)

Blind PD9-GH for detection 180°



PD9-S-SDB-GH-FC



Description	Colour	Part number
PD9-M-1C-SDB-IP65-GH-FC	white	92931
PD9-M-1C-SDB-IP65-GH-FC	silver	92932
PD9-S-SDB-GH-FC (only sensor part)	white	92933
Accessory (optional)		
LUXOMAT® IR-PD9	grey	92201
LUXOMAT® IR-PD-Mini	grey	92159