


## LUXOMAT® PD9-S-GH-FC



Suitably for high-bay storages



"Size comparison"

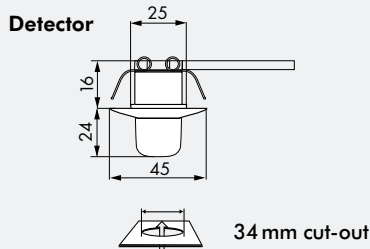

Power supply




### TECHNICAL DATA

- 230V~ ±10%
- 360°
- max. Ø 5.40 m
- IP20 / Class II / CE
- Detector**  
Ø 45 x H 40 mm
- Power supply**  
L 165 x W 24 x H 24 mm
- 25°C to +50°C
- Housing UV- and shock-resistant Polycarbonate
- Slave output**  
 230 V

### PRODUCT INFORMATION

- Mini-Occupancy detector LUXOMAT® PD9-S-GH-FC, Slave with circular detection area, false ceiling mounting or direct installation in lights for Master/ Slave combination
- Occupancy detector with minimal dimensions
- Great energy-saving potential
- One master occupancy detector is necessary for controlling light and heating
- Power supply fits through hole for sensor part in ceiling (34 mm Ø)
- Motion can be detected in all room segments using Slave
- When a movement is detected, the Slave transmits an impulse to the master
- The movement is detected independently of light level
- There are no adjustment elements
- **Typical applications:** monitoring of warehouses, high-bay storages, wherever at a great mounting height is necessary

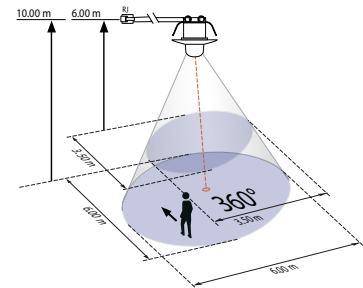

### ACCESSORY (OPTIONAL)

Cover rings for substitution



Blind PD9-GH for detection 180°



| Description | Colour | Part number |
|-------------|--------|-------------|
| PD9-S-GH-FC | white  | 92928       |
| PD9-S-GH-FC | silver | 92929       |

#### Accessory (optional)

|                            |                     |       |
|----------------------------|---------------------|-------|
| Cover ring for PD9 (35 mm) | white, RAL9010      | 92238 |
| Cover ring for PD9 (35 mm) | silver, RAL9006     | 92237 |
| Cover ring for PD9 (35 mm) | anthracite, RAL7021 | 92235 |