



Order description
CDS-A/T white

Order number
RK39500010040

EAN code
4015120010040



Short description:

- Surface-mounted twilight switch for automatic lighting control
- In-built day time switch with various control options
- Floating relay contact
- The light value can be set on the outside of the housing
- LED setting aid (instantaneous)
- Switch-on and switch-off delay
- Double line entrance from below or through the back of the housing
- Large wiring space
- Suitable for wall and inner corner mounting
- Captive stainless steel screws
- Housing made of shock-resistant UV-stabilised polycarbonate

Technical data:

Mains voltage	230 V AC, 50 Hz
Approx. power consumption	1.2 W
Switching capacity	230 V AC, 50 Hz, 10 A (cos phi = 1), 3 A (cos phi =0.5), 12/24 V DC/5 A, floating relay contact
Light value	5 - 300 Lux
Turn-on delay	60 sec.
Switch-off delay	60 sec.
Permissible ambient temperature	-25 °C...+55 °C
Protection type	IP 54
Protection class	II
Test symbol	TÜV Süd
Housing material	UV stabilised polycarbonate
Approx. measurements	height 114 mm x width 80 mm x length 51 mm
Colour	white, similar to RAL 9010

Accessories




Order description
CDS-A/T white

Order number
RK39500010040

EAN code
4015120010040




Dimensions in mm

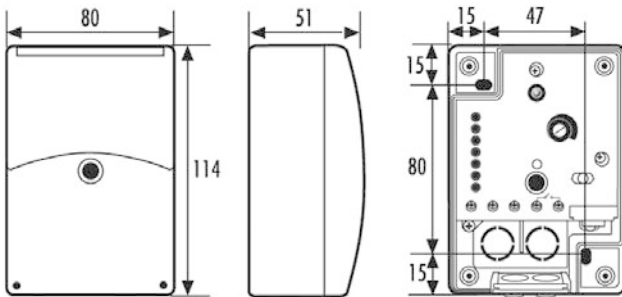


Schaltplan


Dämmerungsschalter CDS-A/T




CDS-A/N
CDSi-A/N



CDSi-A/N16AX



CDS-E



Standardbetrieb: Brücke werkseitig eingebaut → 230 V ~ werden geschaltet.
Wenn die werkseitig eingebaute Brücke entfernt wird, kann der Relaiskontakt potenzialfrei genutzt werden.

www.esylux.com